



ABSOLUTE  
QUALITY  
MADE IN  
FINLAND

Please note that the images are for illustrative purposes only. The final product may vary in design, features or specifications.

# P60SCC

## LARGE OPENING

Workshop crimper for large camlock-style couplings with increased opening diameter. Ideal machine for small to mid-range industrial hoses.

This model turns hydraulics off to conserve energy, and to reduce workplace noise levels whenever the machine is idle.

SCC control brings smartness to workshop crimpers via connectivity and visual user interface, including step crimping as a standard feature. Optional single foot pedal can be connected to workshop SCC models.

### TECHNICAL DATA

Max crimping dia (mm/inch) <sup>1)</sup>	124/4.88
Max crimping dia with master dies (mm/inch)	150/5.9
Max crimping force (kN)	2600
Max crimping force (tonnage)	260
Cycle time 10 mm <sup>2)</sup>	5.8
Hydraulic hose size (inch)	2 ½ *
Industrial hose size (inch)	4.88 *
Die set series	32/140
Max opening (mm) <sup>3)</sup>	+64
Max opening without dies (mm)	204
Master die D/L (mm)	140/120
Master die D/L (inch)	5.52-4.73
Motor Power (kW/HP)	4 / 5.5
Oil tank volume	80 l

### DIMENSIONS (LxWxH)

(mm)	865x553x871
(inch)	34.1x21.8x34.3


### WEIGHT (KG/LBS)

298/656

\* ACCORDING TO THE FITTING.



Foot pedal as an option.

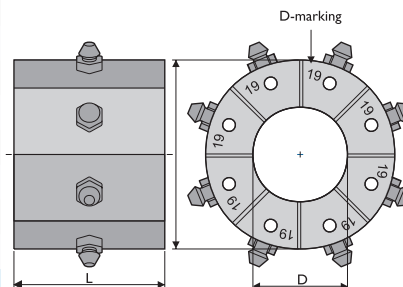

- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10 mm cycle.
- 3) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

Power supply cable not included.

### CONTROL

SCC (5" touchscreen) \*

### STANDARD FEATURES

Adapter dies (part no 402604)  
Mechanical back stop device (part no 720194)

### OPTIONS

Foot pedal (part no 691563)  
Mirror (part no 720200)  
Electrical back stop device (part no 720195)  
Tool base with QuickChange-tool (part no 720198)  
Tool rack with QuickChange-tool (part no 692740)  
QuickChange-tool (part no 701049)

\* MS-control also available



### DIE SET 140-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18860/84	84	110	84.0-92.0
18860/92	92	110	92.0-100.0
18860/100	100	110	100.0-108.0
18860/108	108	110	108.0-116.0
18860/116	116	110	116.0-124.0

### DIE SET 32-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18506/10	10	55	10.0-12.0
18506/12	12	55	12.0-14.0
18506/14	14	55	14.0-16.0
18506/16	16	55	16.0-19.0
18506/19	19	55	19.0-22.0
18506/22	22	70	22.0-26.0
18506/26	26	70	26.0-30.0
18506/30	30	70	30.0-34.0
18506/34	34	75	34.0-39.0
18506/39	39	75	39.0-45.0
18506/45	45	90	45.0-51.0
18506/51	51	90	51.0-57.0
18506/57	57	100	57.0-63.0
18506/63	63	110	63.0-69.0
18506/69	69	110	69.0-75.0
18506/74	74	110	74.0-80.0
18506/78	78	110	78.0-87.0

In addition to the standard die sets, a wide range of special die sets is available on request.